

Platinum Professional Level 8 Channel NVR 1U


LTN8708Q1-P8



Key Features:

Rear Panel:

- H.265/H.265+/H.264/H.264 Zip+/MPEG4 video formats
 - Support live view, storage, and playback of the connected camera with up to the resolution of 8 Megapixels
 - Recording at up to 8MP resolution
 - Up to 1 SATA interfaces connectable for recording and backup
 - HDMI output at up to 4K(3840 x 2160) and VGA output at up to 1920 × 1080p resolution
1. Network Interfaces with PoE function
 2. Audio In
 3. Audio Out
 4. VGA Interface
 5. HDMI Interface
 6. LAN Network Interface
 7. USB Interface
 8. 48VDC power supply
 9. Power Switch
 10. GND

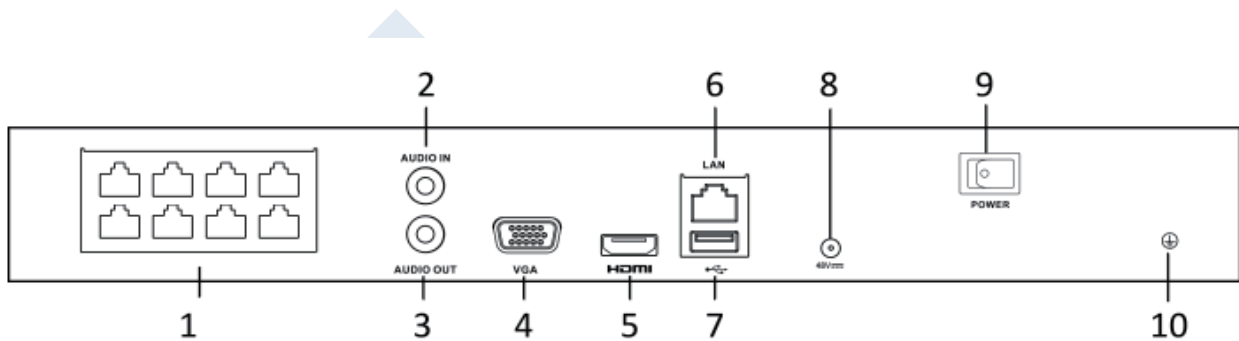

Platinum Professional Level 8 Channel NVR 1U

LTN8708Q1-P8

Video/Audio Input	
IP video Input	8-ch
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1kΩ)
Network	
Incoming bandwidth	80 Mbps
Outgoing bandwidth	80Mbps
Video/Audio Output	
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
HDMI output	4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA output	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Audio output	1-ch, RCA (Linear, 1kΩ)
Decoding	
Decoding format	H.265/H.265+/H.264/H.264 Zip+/MPEG4
Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
Synchronous playback	8-ch
Capability	1-ch @ 8 MP / 4-ch @ 1080p
Hard Disk	
SATA	1 SATA interfaces for 1 HDDs
Capacity	Up to 6TB for each disk
External Interface	
Network Interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface
Network protocols	TCP/IP, DHCP, PT CLOUD, DNS, DDNS, NTP, IP Portal, SMTP, NFS, iSCSI, UPnP™, HTTPS
USB Interface	2 × USB 2.0
PoE	
Interface	8, RJ-45 10/100 Mbps self-adaptive Ethernet interfaces
Max. Power	≤ 75W
Supported standard	IEEE 802.3 af/at
GENERAL	
Power Supply	48V DC
Power	≤ 90W
Consumption	≤ 10W (without enabling PoE)
Working Temperature	14° F - 131° F (-10° C ~ +55° C)
Working Humidity	10% - 90%
Casing	1U chassis
Dimensions (WxDxH)	315 × 240 × 48mm (12.4 × 9.4 × 1.9 inch)
Weight	≤ 1 kg (2.2 lb)