

EX-SDI 1080p(2MP) Brick Camera / Dual Power



EX-SDI1080pDC 12V • AC 24VIndoor1/2.9" Sony CMOS • True Day & Night(ICR) • DNR (Digital Noise Reduction) • AWB (Auto White Balance) • SENS-UP • EX-SDI • HD-SDI selectable • Balun compatible • Lens not included • Made in Korea

What is EX-SDI?

Union of great advantages from all existing technologies

HD-SDI

- Digital lossless quality
- Strong resistance to interference

HD-TVI • CVI • AHD


- Long transmission distance
- Able to use video baluns

EX-SDI
THE NEXT GENERATION HD-TECHNOLOGY

EX-SDI 1080p(2MP) Brick Camera / Dual Power

The Secrets

EX-SDI utilize low frequency signal combine with the new VLC (Visually Lossless CODEC) technology, able to push up 99% identical image quality at more than twice the transmission distance.

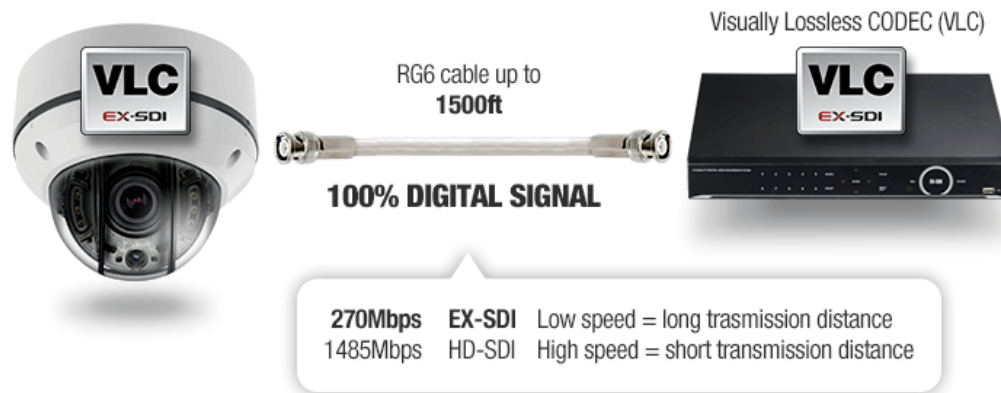

Ready for 4K

EX-SDI is built in mind of adopting 4K resolution to security. Thanks to the EX-SDI VLC feature, because of that it is possible to transmit 4K in realtime FPS over coaxial cable.


Backward Compatibility

EX-SDI Magic series will work with any HD-SDI cameras. Just like the Magic series once were compatible with their predecessors' technologies

Video Balun compatible

UTP cable is another option to transmit EX-SDI video signal in order to reduce cable cost. Specialized video balun for EX-SDI is required. (sold separately)

EX-SDI 1080p(2MP) Brick Camera / Dual Power

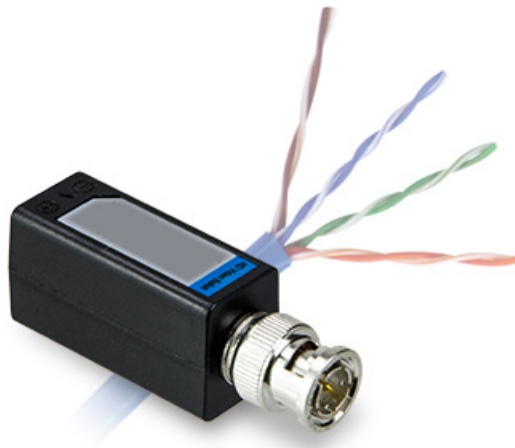

SPECIFICATIONS

Sensor	1/2.9 inch SONY CMOS (IMX-222 / IM x 322)
Total Pixels	2000(H) x 1241(V) = 2,482,000
Effective Pixels	1944(H) x 1092(V) = 2,122,648
Scanning System	PROGRESSIVE
S/N (Y signal)	More than 52 dB (AGC Off)
Video Output	SMPTE274M (HD-SDI) / (CVBS: 1.0Vp-p (75ohm) : Option)
Min.Illumination	1 Lux at F1.2 / 0.1 Lux (B/W)
White Balance	AUTO / AUTO EXT / PRESET / MANUAL
shutter	AUTO / MANUAL (1/30sec ~ 1/60,000sec)
Brightness	ADJUSTABLE (0 ~ 20 STEP)
SENS_UP	OFF / x 2 / x 4 / x 8 / x 16 / x 32
DNR	OFF / LOW / MIDDLE / HIGH
BACKLIGHT	OFF / WDR / BLC / HLC
ACE	OFF / LOW / MIDDLE / HIGH
Day & Night	AUTO (Day <--> Night TIME Change) , COLOR , B/W, EXTERN,
Privacy	OFF / ON

EX-SDI 1080p(2MP) Brick Camera / Dual Power

Motion	OFF / SET
D.ZOOM	x1.0 ~ × 16.0
FLIP	OFF / ON
FREEZE	OFF / ON
Language	ENG, CHN, CHN(S), JPN, KOR
Sharpness	ADJUSTABLE (0 ~ 10 STEP)
DEFOG	OFF / SET
COMM	RS-485 (PELCO-D)
SMART IR (IR product SPEC.)	ADJUSTABLE (0 ~ 20 STEP)
Operating Temperature / Humidity	14°F ~ 122°F(−10°C ~ 50°C) / 30% ~ 80% RH
Storage Temperature / Humidity	−4°F ~ 140°F(−20°C ~ 60°C) / 20% ~ 90% RH
Power	DC12V [AC24V / DC12V DualPower (option)]
signal Transmission	The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI (200M) / EX-SDI (400M))