


BIS LG Aluminum Weatherproof Box



UL Listed: UL 508A, NEMA 3R (standard)	Dimensions: - Overall: (H) 22.625" x (W) 19.25" x (D) 19.625" - Opening: (H) 15.125" x (W) 15.75" - Inside: (H) 17.875" x (W) 17.75" x (D) 18.75"	Weight: 32 lbs
		

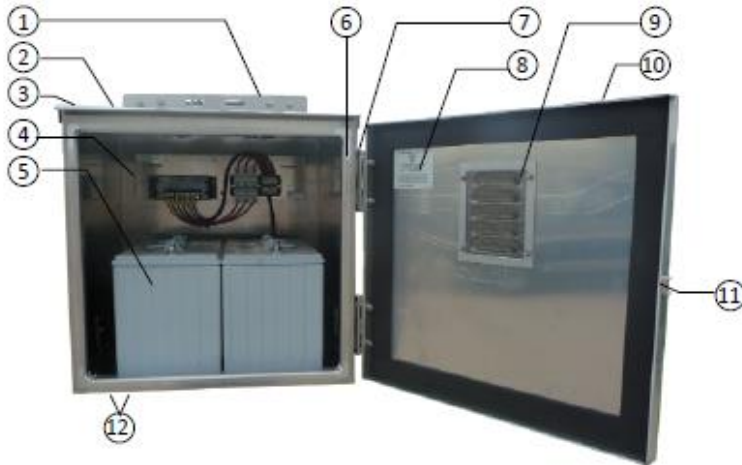

- ① Mounting Tab
- ② Cabinet
- ③ Rain Drip Lip
- ④ Back Panel
- ⑤ Battery
- ⑥ Double Flanged Door Opening
- ⑦ Stainless Steel Hinge
- ⑧ UL Listing / NEMA Rating
- ⑨ Fiberglass "Insect Proof" Screen on all Louvered Openings
- ⑩ Closed Cell Neoprene Gasket
- ⑪ Stainless Lockable Draw Latch
- ⑫ (2) 1/2" NPT Knock-outs (CGB's / Conduit fittings)

ROHN Tower Mounted



- Fits ROHN25 Tower
- (4) U-Bolts - not included

Pole Mounted



- Fits 2" to 3" pipe / SCH 40 pole
- Use (2) U-Bolts - not included

Wall Mounted



- (4) Lag Bolts - not included

"Call for pricing and availability on the below options:"

Assembly (Optional)



- Custom design and sized to meet solar system requirements

Door Fan (Optional)




- Fans available in : (12V, 24V and 48V DC / 120V AC)

Banding (Optional)



Additional Options

- Breather-drain (ECD15) for NEMA4 / 4X (Required for all battery applications)
- Heat strips (120V 150W with thermostat)
- Interior insulation (Low E)
- Sun shields - available for top, sides and door
- Key lock (#1 or #2 Pelco)

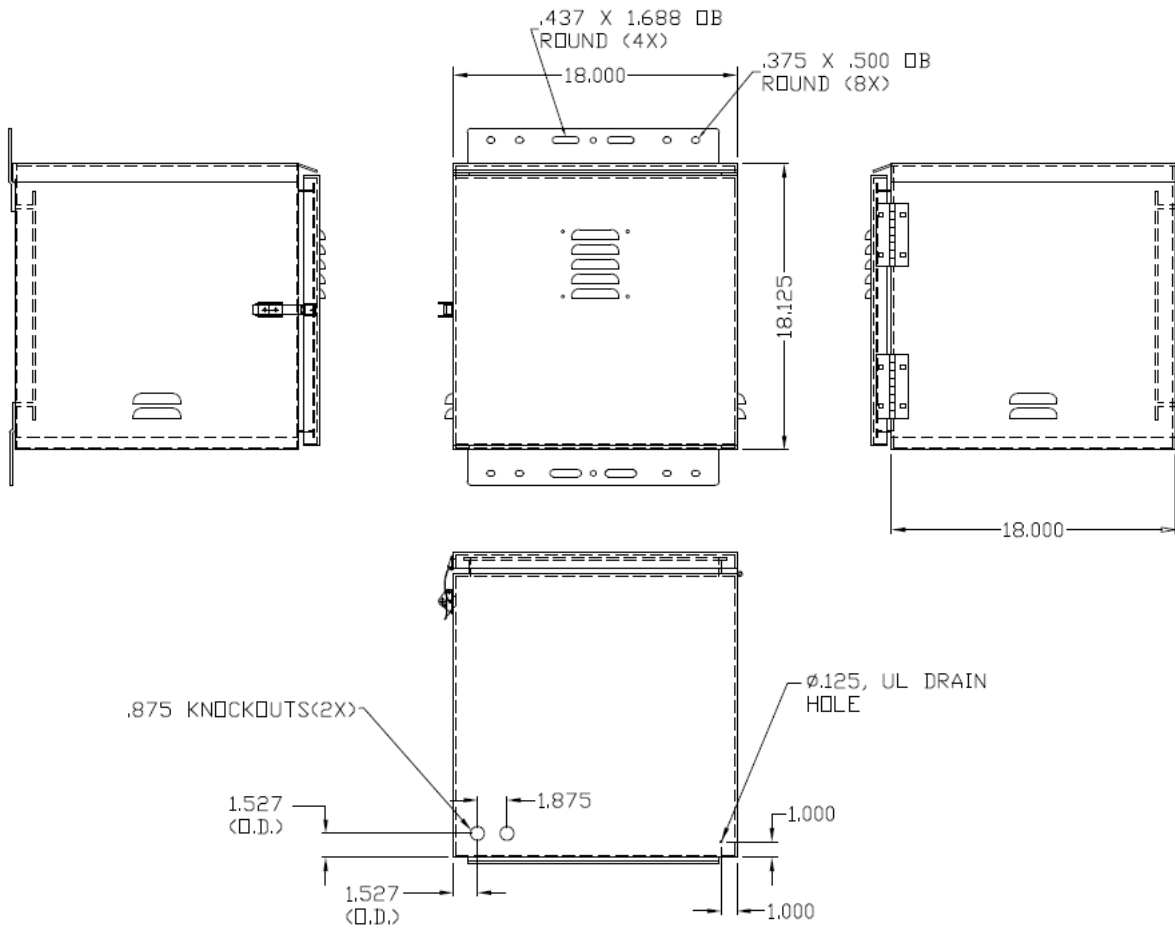

- NOTE:
1. POLE, BANDING, OR WALL MOUNT CONFIGURATION.
 2. CABINET DIMENSIONS INSIDE, 18"H X 17.750"W X 17.750"D.
 3. MANUFACTURED TO NEMA 3R SPECIFICATIONS.
 4. DOUBLE FLANGED DOOR OPENING.
 5. SST HINGE AND HARDWARE.
 6. SCREENED LOUVERS ON DOOR FOR VENTILATION.
 7. 14.50 X 15.00 X .125 ALUM. BACK PANEL.
 8. .250 X 1.50 GRISWOLD GASKET USED
 9. ONE (1) PAD LOCKABLE DRAW LATCH