

DS-2CE56D5T-VFIT3

HD1080p Turbo HD Outdoor Vari-Focal EXIR Turret Camera




EXIR



Key Features

- HD1080p Video Output
- HD-TVI Standard Technology
- True Day/Night
- 2.8–12 mm Vari-Focal Lens
- OSD Menu, 3D DNR, Smart IR
- EXIR Technology, 50 m IR Distance
- Up-the-Coax (UTC) OSD Menu Control
- 120 dB Wide Dynamic Range

Dimensions

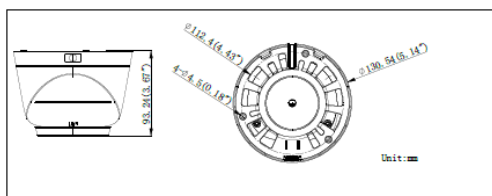

Accessories



Wall Mount:
WML + PC130T



Angled Base Mount
ABM



Video Balun
DS-1H18



Conduit Base CBM

Available Models

DS-2CE56D5T-VFIT3

DS-2CE56D5T-VFIT3	
Camera	
Image Sensor	1/3" progressive scan CMOS
Signal System	NTSC
Effective Pixels	1920 x 1080
Minimum Illumination	0.014 lux @ (f/1.4, AGC on), 0 lux with IR
Shutter Speed	1/30 sec. to 1/50,000 sec.
Lens	2.8–12 mm, f/1.4 Angle of view: 92°–32°
Lens Mount	φ14
Angle Adjustment	Pan: 0–360°, tilt: 0–90°, rotation: 0–360°
Day/Night	IR cut filter
Wide Dynamic Range	120 dB
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 25 fps/1080p @ 30 fps
HD Video Output	1 analog HD output
CVBS Output	1 V p-p composite output (75Ω/BNC)
S/N Ratio	More than 52 dB
Menu	
Scene	Indoor, Outdoor, Indoor1, LOW-LIGHT
Camera ID	On/off (15 characters, position programmable)
AGC	Supported
D/N Mode	Color/BW/EXT
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual
Motion Detection	On/off, maximum 4 zones
Privacy Mask	8, selectable color or mosaic
BLC	Supported
Anti-Flicker	On/off
Languages	English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew, and Arabic
Functions	Eclipse, digital noise reduction, digital zoom (62x), slow shutter, mirror, defog, defect pixel correction, SMART D-ZOOM
General	
Working Temperature/ Humidity	-30° C–60° C (-22° F–140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 7 W
Weatherproof Rating	IP66
IR Range	Up to 50 m IR range
Communication	Up-the-Coax
Dimensions	φ130.54 × 93.24 mm (φ5.14" × 3.67")
Weight	300 g (0.66 lb.)