


EX-SDI 1080p(2MP) Anti-IR Reflection Large Size Indoor Dome w/ 4 COB IR



Anti-IR Reflection Series(The Shield) : prevents washed out video caused by IR reflection from obstacles(water or oil) on cover (US/China Patented) • 4 pcs of **COB IR** • 2.8-12mm Mega-pixel Lens • True Day & Night(ICR) • EX-SDI / HD-SDI selectable • Balun compatible • Made in Korea


What is EX-SDI?

Union of great advantages from all existing technologies

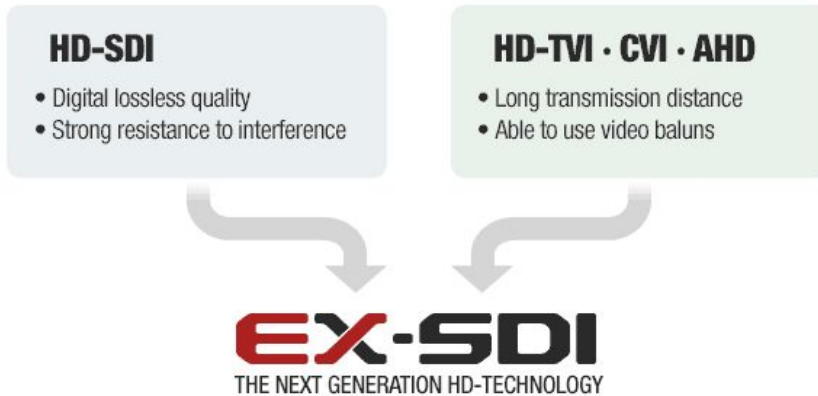

The Secrets

EX-SDI utilize low frequency signal combine with the new VLC (Visually Lossless CODEC) technology, able to push up 99% identical image quality at more than twice the transmission distance.

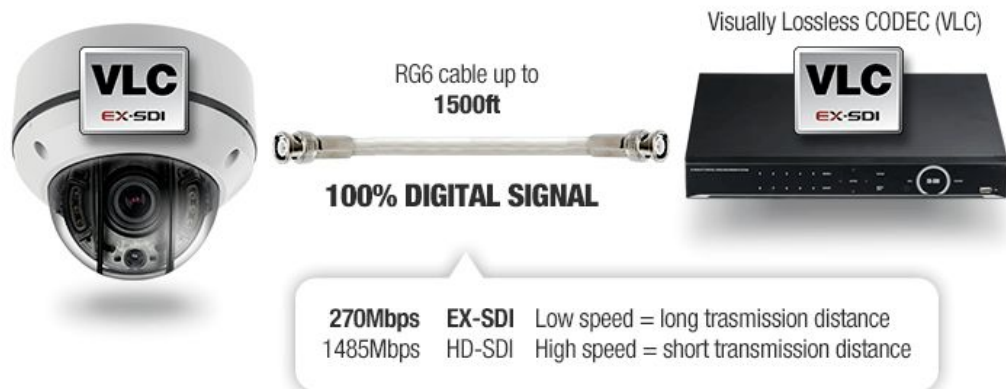

Ready for 4K

EX-SDI is built in mind of adopting 4K resolution to security. Thanks to the EX-SDI VLC feature, because of that it is possible to transmit 4K in realtime FPS over coaxial cable.

Video Balun compatible

UTP cable is another option to transmit EX-SDI video signal in order to reduce cable cost. Specialized video balun for EX-SDI is required. (sold separately)



FEATURES


- **1080p** FULL HD Flawless Video
- **Anti-IR Reflection Series** : (The Shield) : prevents washed out video caused by IR reflection from obstacles(water or oil) on cover (U.S. Patent Pending)
- **4 High Powered IR LED** : Up to 50% more brighter than conventional IR LED
- **SUPERDOME®** (US Patent : 8337100) series camera with easy flip cover open
- **Dual Video Output** : EX-SDI/HD-SDI & CVBS - Analog
- 1/2.9 inch Sony CMOS : Low Power Consumption
- Minimum Illumination - 0 Lux with IR on
- 2.8~12mm Auto-Iris **IR Corrected** Lens Installed - provides the best focused image both color & IR mode
- Auto Removable IR-Cut Filter (ICR) : True Day & Night. Deep color and clear video at both day and night time
- **OSD** (On Screen Display) - Easy camera setup
- DNR (Digital Noise Reduction) • D-WDR (Digital Wide Dynamic Range) • HLM (High Light Masking) and more advanced image enhancing features
- DC 12V only

SPECIFICATIONS


Resolution	1080p, 720p
Sensor	1/2.9 inch SONY CMOS (IMX-222 / IMX322)
Total Pixels	2000(H) × 1241(V) = 2,482,000
Effective Pixels	1944(H) × 1092(V) = 2,122,648
Scanning System	Progressive
S/N (Y Signal)	More then 52 dB (AGC Off)
Video Output	SMPTE274M (HD-SDI) / CVBS: 1.0Vp-p (75ohm)
Min. Illumination	0 Lux at IR On
White Balance	Auto / Auto Ext / Preset / Manual
Shutter	Auto / Manual (1/30sec ~ 1/60,000sec)

Brightness	Adjustable (0~20 Step)
Sens Up	OFF / x2 / x4 / x8 / x16 / x32
DNR	OFF / Low / Middle / High
Backlight	OFF / WDR / BLC / HLM
ACE	OFF / Low / Middle / High
Day & Night	Auto (Day <--> Night Time Change), Color, B/W, Extern
Privacy	OFF / ON
Motion	OFF / ON
D.ZOOM	x1.0 ~ x16.0
Flip	OFF / ON
FREEZE	OFF / ON
Language	English, Chinese, Chinese(S), Japanese, Korean
Sharpness	Adjustable (0~10 Step)
Defog	OFF / SET
Communication Port	RS-485 (Pelco-D)
Smart IR	Adjustable (0~20 Step)
Operating Temp / Humidity	-10°C ~ +50°C(14°F ~ 122°F) / 30%~80% RH
Storage Temp / Humidity	-20°C ~ +60°C(-4°F ~ 140°F) / 20%~90% RH
Power	DC 12V
Signal Transmission	The distant difference is occurred according to cable option and other circumstances. (based on 5C-HFBT : HD-SDI (200M) / EX-SDI (400M))

DIMENSIONS



unit : mm

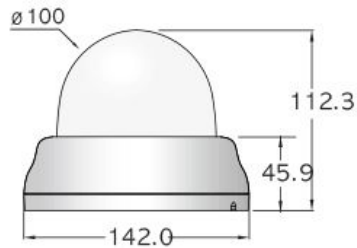

Camera Inputs & Outputs



Camera Contents

